

Optix MPO 1200 Direct

OPTIX SURFACE 1200 MPO D HO 4000K DALI
2021666



Product features

- OPTIX SURFACE 1200 MPO D HO 4000K DALI is a high efficacy low glare surface or suspended LED Linear luminaire with Micro Prismatic diffuser, with direct light distribution, luminaire dimensions: 1200x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, DALI Dimmable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3550lm luminous flux, 31W power consumption, 114lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<20, Luminance at 65° < 3000 cd/m2, lifespan: 58,000 hours L90B10, photobiological safety risk group 1. Electrical protection Class I.



NOTES

undefined

PRODUCT OVERVIEW

Product name	OPTIX SURFACE 1200 MPO D HO 4000K DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3550
Luminous flux (lm)	3550
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216666

Optix MPO 1200 Direct

OPTIX SURFACE 1200 MPO D HO 4000K DALI
2021666

DATA TABLE

General data

Product name	OPTIX SURFACE 1200 MPO D HO 4000K DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3550
Luminous flux (lm)	3550
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 20
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	31
Primary Supply/Product voltage - min (V)	198.0
Primary Supply/Product voltage - max (V)	264.0
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	300
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45

Optix MPO 1200 Direct

OPTIX SURFACE 1200 MPO D HO 4000K DALI
2021666

Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27

Lifetime data

Lifespan L70 B50	238000
Lifespan L80 B20	130000
Lifespan L90 B10	58000



Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	200
Nominal Product Height (mm)	50
Weight (kg)	4.5

Packaging

Single packaging type	Carton
Product EAN number	5025768216666
Packaging single length / height (cm)	122.0
Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (outer)	05025768216666
Units per outer package	1
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	6.8

PHOTOMETRY

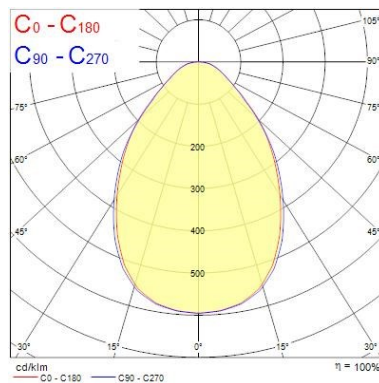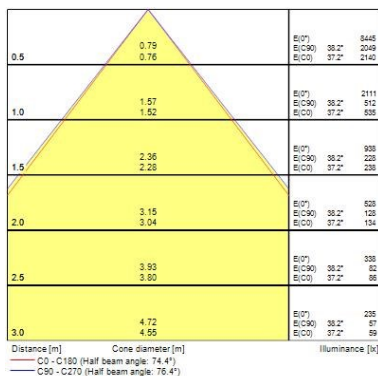

Optix MPO 1200 Direct

OPTIX SURFACE 1200 MPO D HO 4000K DALI
2021666

TECHNICAL DRAWINGS

